


## 2-Fiber Duplex figure 8 indoor Cable

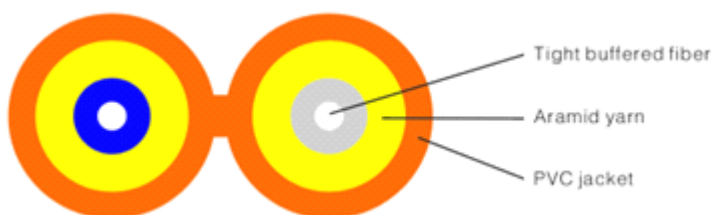

### Description

Indoor OFC, 2 fibers, Figure 8 structure,  $\Phi 900\mu\text{m}$  or  $\Phi 600\mu\text{m}$  Tight buffer fiber, Aramid yarn, PVC Jacket.

### Features

- ◆ Good uniformity of the outer diameter of tight buffer fiber and excellent strippability;
- ◆ Good performance of flame-retardant;
- ◆ Low induced attenuation within the operating temperature range;
- ◆ Excellent geometrical dimension of the fiber;

### Technical Parameters

Type	Cable Diameter (mm)	Cable Weight (kg/km)	Tensile Strength Long/Short Term (N)	Crush Resistance Long/Short Term (N/100mm)	Bending Radius Static/Dynamic (mm)
1	$(3.4\pm 0.4)\times(1.6\pm 0.2)$	7.3	100/200	200/1000	20/10
2	$(4.2\pm 0.4)\times(2.0\pm 0.2)$	10.5	100/200	200/1000	20/10
3	$(6.0\pm 0.4)\times(2.8\pm 0.2)$	15.6	100/200	100/500	20/10

### Application

- ◆ Data communication;
- ◆ Connection, making jumper, pigtail and b